

DP8200x



Installation quality, meeting room flexibility.


CONNECTIVITY, FLEXIBILITY

The remarkable flexibility of the Proxima® DP8200x starts with its ability to be ceiling mounted or carted between rooms for a high-end meeting room solution. With six inputs, there's no need for an external switcher for multiple presenters. Need to change lenses for different rooms? No problem. User-replaceable bayonet lenses can be changed without tools—just push and twist.

EASY TO USE, EASY TO MAINTAIN

Do-it-yourself installation is just the beginning of the DP8200x's user friendliness. An intelligent, multi-language, backlit interactive display guides presenters through set up and use, providing instant feedback. Get even fewer support calls with color-coded connections that make changing configurations easy. And the DP8200x is easily networked right out of the box, with ProjectorNet™ software by InFocus® Corporation.

ProjectorNet




UPWARDLY COMPATIBLE

Gain complete control of the projector from your laptop with InFocus ProjectorManager™, a free application that turns any PC into an advanced projector remote control. Now users can remotely adjust projector settings from their laptop, switch sources, even access features not available from the projector's onboard menu system, including power management controls and presentation collaboration tools.

STURDY RELIABILITY

If you're familiar with the Proxima quality promise, you know the DP8200x is dependable and durable, delivering performance you can trust. Its built-in handle makes it easy to hold when moving it between rooms. Rubber bumpers give the DP8200x a sturdy, protective base.

DP8200x

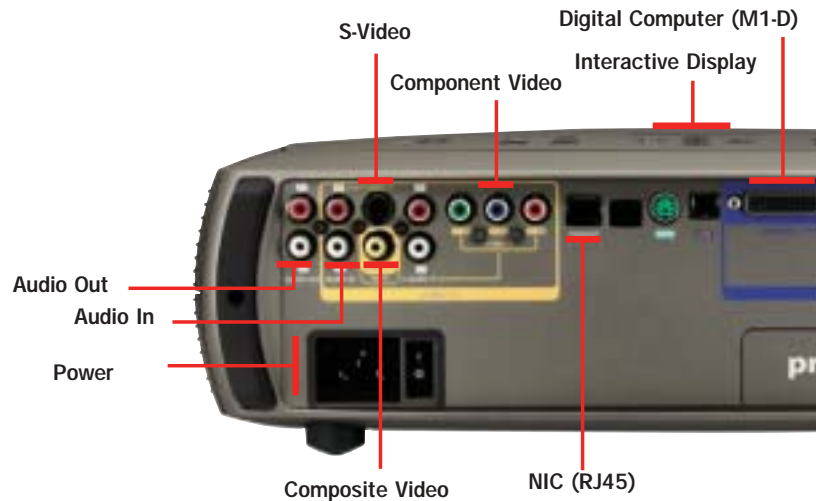

PROJECTION DISTANCES DP8200x 1.8 - 2.4:1 Std Throw Chart

Distance		Minimum Image				Maximum Image			
		Diagonal Image		Image Width		Diagonal Image		Image Width	
5'	1.5m	2.60'	0.79m	2.08'	0.64m	3.47'	1.06m	2.78'	0.85
10'	3.0m	5.21'	1.59m	4.17'	1.27m	6.94'	2.12m	5.56'	1.69
15'	4.6m	7.81'	2.38m	6.25'	1.91m	10.42'	3.18m	8.33'	2.54
20'	6.1m	10.42'	3.18m	8.33'	2.54m	13.89'	4.23m	11.11'	3.39
25'	7.6m	13.02'	3.97m	10.42'	3.18m	17.36'	5.29m	13.89'	4.23
30'	9.1m	15.63'	4.76m	12.50'	3.81m	20.83'	6.35m	16.67'	5.08
32.8'	10.0m	17.08'	5.21m	13.67'	4.17m	22.78'	6.94m	18.22'	5.55

FULL FEATURED, FULL FLEXIBILITY

Get connected to options. The Proxima DP8200x is a high-performance projector with meeting room ease and flexibility, all in a low-maintenance package. Want the flexibility to mount your projector on the ceiling, or move it from room to room? Need an upgradeable solution that gives you ultimate reliability? The Proxima DP8200x is a uniquely flexible projection solution that's as easily shared as it is integrated into almost any room.


At last, a full-featured installation projector that's also easy to move from room to room. Full connectivity and control are yours, in a solutions-enabled design that lets you install it in almost any room configuration or move it between rooms.

INSTALLATION QUALITY, MEETING ROOM FLEXIBILITY

With its incredible ease of use and broad compatibility with a variety of sources, the Proxima DP8200x creates new versatility in installation projectors. And a

perfect image is yours every time—no matter where the projector is in the room—with horizontal and vertical keystone correction. Scroll-and-select menus and an exclusive interactive display make it easy for users to set up and project, all without the need for studying complicated directions beforehand.




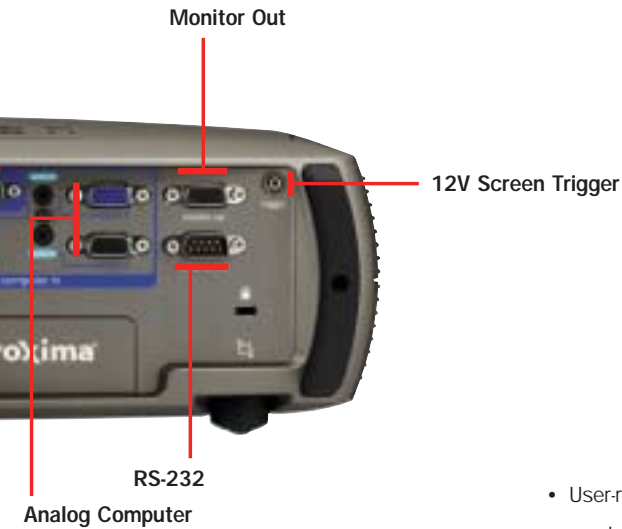

GET CONNECTED TO:

- Superb picture quality, with native XGA resolution, 800:1 contrast ratio and 3200 lumens.
- Broad connectivity, including six inputs (3 video plus 3 PC) and color-coded connections, make connecting to multiple computer and video sources simple for any user.
- Easy-to-manage networking capability with InFocus ProjectorNet™.

- User-replaceable bayonet lenses can be changed without tools.
- Intelligent, 12-language interactive display that takes ease-of-use to a new level.
- Horizontal and vertical keystone correction for a perfect picture every time, no matter where in the room you place the projector.
- Compatible with InFocus LiteShow® wireless solution.
- Durable ergonomic design that lets you handle with confidence.

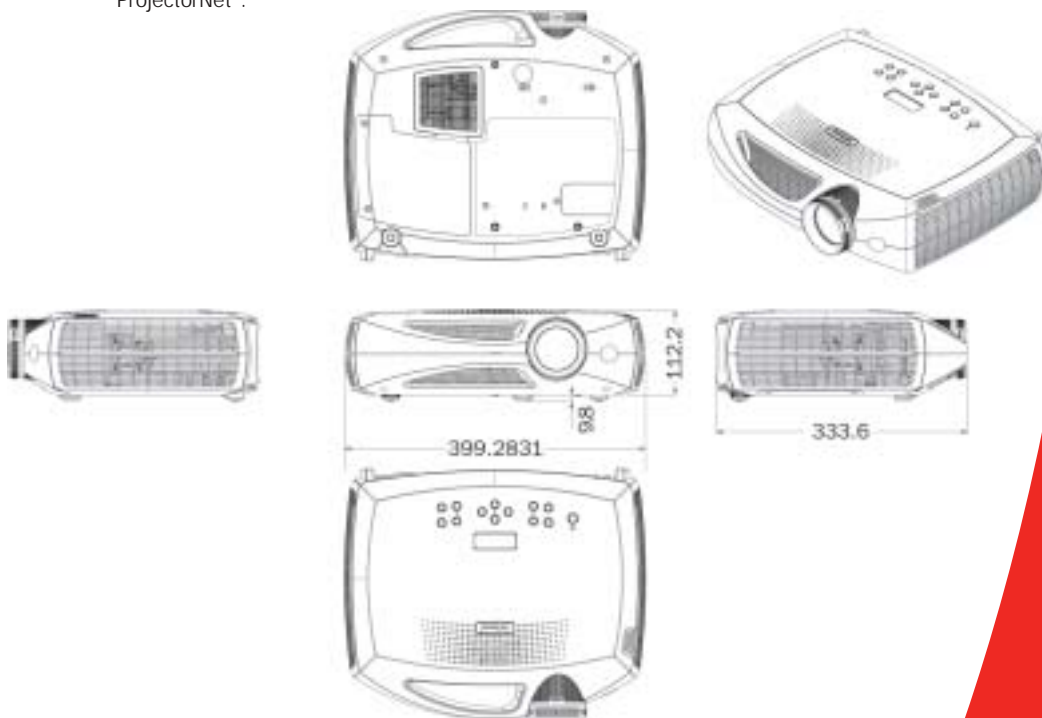

EASE FOR THE ENTERPRISE

For presenters, nothing could be easier. The DP8200x delivers the most advanced features with none of the hassles. That means one-touch, instant projection. An exclusive backlit interactive display guides users through a smooth set up.

The DP8200x is as easy to support as it is to use. Besides eliminating many support service issues, Proxima's intelligently designed products save time and resources. ProjectorNet asset management networking allows IT personnel to manage, monitor, and maintain multiple projectors from a single PC, allowing for fast, cost-effective control.

TECHNICAL SPECIFICATIONS

Native Resolution	• XGA 1024 x 768
Display Technology	• 3 x .99" polysilicon TFT LCD, active-matrix MLA
Computer Input Sources	• Computer 1 (M1-D), Computer 2 (VESA), Computer 3 (VESA), Audio inputs (Stereo 3.5mm x 2)
Video Input Sources	• Video 1 (S-Video), Video 2 (Composite RCA), Video 3 (Component RCA), Audio Inputs (Stereo RCA x 2)
Control Input Sources	• NIC (RJ45), RS232, PS2, USB
Output Sources	• Variable Stereo Audio (RCA), Monitor Out (VESA), 12V Screen Trigger
Computer Compatibility	• SXGA, XGA, SVGA, VGA, Macintosh*
Video Compatibility	• Full NTSC, PAL, SECAM, EDTV, HDTV (1080i, 1080p, 720p, 480p, RGBHV)
Brightness	• 3200 max ANSI lumens
Brightness Uniformity	• 85%
Contrast Ratio	• 800:1 full on/full off
Number of Colors	• 16.7 million
H-Synch Range	• 25 – 100 kHz
V-Synch Range	• 50 – 85 Hz
Dot Clock	• 170 MHz
Digital Keystone Correction (Horizontal)	• +/- 15°; data/video
Digital Keystone Correction (Vertical)	• +/- 25°; data/video
Projection Lens (Standard)	• User-changeable manual zoom lens • Zoom Ratio 1.3:1 • Throw Ratio 1.8:1 – 2.4:1 (D:W)
Projection Distance	• 5' – 32.8' / 1.5m - 10.0m
Image Offset ratio (%)	• 100 ± 5 %
Projection Lens (opt. long throw LENS 021)	• User-changeable manual zoom lens • Zoom Ratio 1.8:1 • Throw Ratio 3.0:1 – 5.5:1 (D:W)
Projection Distance	• 16.4' and greater (5m and above)
Image Offset ratio (%)	• 100 ± 5 %
Projection Lens (opt. Short throw LENS 020)	• User-changeable fixed focal length lens • Zoom Ratio not applicable • Throw Ratio 1.2:1 (D:W)
Projection Distance	• 3.3' – 19.7' / 1.0 - 6.0m
Image Offset ratio (%)	• 100 ± 5 %
Aspect Ratio	• 4:3
Image size (diagonal)	• 40" – 200" / 101.6cm – 508.0cm
Projection Methods	• Front, rear and ceiling
Projector Audio (On-Board)	• 2x1-Watt stereo
Projector Interface	• User LCD interface or Menu system
Projector Interface Languages	• English, Spanish, French, German, Japanese, Korean, Portuguese, Italian, Norwegian, Russian, Chinese Simple, Chinese Traditional
Projector Control	• IR Remote, keypad, ProjectorManager™, RS 232, NIC (RJ45), ProjectorNet™
Mouse Control	• USB, PS2
Lamp	• 250-Watt UHP / 2000 hours*
Dimensions	• 4.3" x 13.1" x 15.6" (11.0cm x 33.3cm x 39.7cm)
Weight	• 13.1 lbs/6.0 kg
Power Consumption	• 350 watts
Power Supply	• 100V – 240V at 50/60 Hz
Operating Temperature	• 10°C to 35°C at sea level (0 to 10,000'); 50°F to 95°F
Audible Noise	• 38dB (standard mode), 34dB (whisper mode)
Approvals	• FCC A (US/Canada), S-JOA (Japan), PSE (Japan), CCC (China), IRAM (Argentina), GOST (Russia), UL & cUL (US/Canada), TUV GS (Germany), NOM (Mexico), MIC (Korea) C-Tick (Australia)
Lamp Warranty	• 90 days or 500 hours, whichever comes first
Warranty	• 2 years parts and labor
Accessory Warranty	• 1 year

*Actual lamp life may vary based on the ambient environment. Conditions that may affect lamp life include temperature, altitude or rapidly switching the projector on and off, and between standard and low power modes.

†InFocus Corporation reserves the right to alter product offerings and specifications at any time without notice.

Optional Accessories

A650	Screen, Tabletop, 50"/127cm
CA-ATA-017	ATA Approved Shipping Case
HW-DLXSCRN	Deluxe Insta-theatre Screen, 60"/152cm
HW-INTEGRATOR	Integrator Remote
HW-PRESENTER	Presentation Remote
HW-RF-POCKTPNT	Mind Path™ RF Pocketpoint Remote
HW-WALLSCR84	Manual Wall/Ceiling 84"/213cm Screen
LENS-020	Short Throw Lens
LENS-021	Long Throw Lens
SP-AV30	Audio/Video Cable
SP-CEIL-005-B	Ceiling Mount
SP-DVI-D	Digital Cable, USB + DVI to M1-D
SP-LAMP-012	Replacement Lamp
SP-LOCK-B	Projector Cable Lock
SP-LTMT-EXTP	LM+ Extension Arm 26-47"/66 – 119 cm
SP-LTMT-PLT	Ceiling Plate, Litemount
SP-VESA-ADPT	Component to VESA Adapter
SP-VGAEXT50-D	VGA 50'/15m Cable/Line Amp Extension Solution US
SP-VGAEXT50-I	VGA 50'/15m Cable/Line Amp Extension Solution-International

SERIOUS COMMITMENT

Proxima's dedication to quality and customer satisfaction is reflected in service options that will bring you a greater return on your investment. Proxima projectors come with a standard two-year limited factory warranty, including parts and labor and a 90-day lamp replacement. Our customer support offers you premium service and convenience, whatever your needs.

For service program details in your region, please visit:

www.infocus.com/service/service_offerings

Ships Standard With

- Protective sleeve
- Conductor Plus full-featured remote with laser pointer
- Color-coded cable straps
- VGA analog computer cable
- USB mouse cable
- 3.5mm computer audio cable
- RCA audio/video cable
- Power cord
- User manual, quick start card and CD
- Projection Lamp Module
- Lens Cap

Contact InFocus Corporation or your dealer today.

www.proxima.com

InFocus Corporate Headquarters:

27700B SW Parkway Avenue • Wilsonville, Oregon 97070-9215, USA
Phone: 503-685-8888 • 1-800-294-6400 • Fax: 503-685-8887

In Europe: InFocus International BV

Strawinskylaan 585 • 1077 XX Amsterdam • The Netherlands
Phone: (31) 20 5792000 • Fax: (31) 20 5792999
Freephone: 008000 4636287 (008000 INFOCUS)

In Asia: 238A Thomson Road • #18-01/04 Novena Square

Singapore 307684 • Telephone: (65) 6334-9005 • Fax: (65) 6333-4525

Proxima is a registered trademark of InFocus Corporation. All other trademarks are property of their respective owners. ©2003 InFocus Corporation. All rights reserved. 10/03 815-0093-01 DP8200x_DS_E_V01.qxd